

## Using the DOE Concept to Determine the Appropriate Operating Conditions for the D87 Heavy-Duty Diesel Engine under RCCI Combustion Fueled with Diesel Fuel and Natural Gas

Mohammad Reza Salmani Marasht<sup>1</sup>, Seyed Ali Jazayeri<sup>\*2</sup>, Mojtaba Ebrahimi<sup>1</sup>

<sup>1</sup> Department of Mechanical Engineering, Ayatollah Amoli Branch, Islamic Azad University, Amol, Iran

<sup>2</sup> Department of Mechanical Engineering, K. N. Toosi University of Technology, Tehran, Iran

Received: 2022-06-22

Revised: 2022-08-25

Accepted: 2022-09-13

**Abstract:** The main purpose of this study is to determine the appropriate operating conditions for Iranian national heavy-duty diesel engines under RCCI combustion fueled with natural gas and diesel fuel. Therefore, in the RCCI combustion simulation, based on the DOE concept, the effect of changing six major parameters namely the IVC pressure, the IVC temperature, the diesel fuel SOI timing, the engine speed, the natural gas/diesel fuel mass ratio, and the effective compression ratio on the engine performance and combustion characteristics were assessed. The simulation results show that considering the IVC pressure between 2.3 and 2.7 bar, the IVC temperature between 350 and 380 K, the diesel fuel SOI timing between -30 and -50 ° ATDC, the NG/diesel fuel mass ratio between 70/30 and 90/10, and the engine speed between 1300 and 1600 rpm lead to optimal D87 engine operation. Where the GIE can be improved to more than 40% compared to the D87 engine operation under the dual-fuel mode of combustion. Although, the engine output power is noticeably reduced up to 17%, the NOx emission level gets close to the EURO V level and the CO emission level gets close to the EURO VI level. At the same time, the UHC emission level is far from the EURO VI level and the Formaldehyde emission level is far from the EPA 2007 level.

**keywords:** D87 Heavy-duty diesel engine, Combustion, RCCI; Emission, Natural gas.

### Nomenclatur

|      |                                      |      |  |
|------|--------------------------------------|------|--|
| AEO  | U.S. annual energy outlook           | LHV  | Lower heating value                        |
| ATDC | After top dead center                | LNT  | Lean NOx trap                              |
| CA   | Crank angle                          | LTC  | Low temperature combustion                 |
| CA10 | Crank angle of 10% fuel burned       | LFG  | Landfill gas                               |
| CA50 | Crank angle of 50% fuel burned       | LPG  | Liquefied petroleum gas                    |
| CFD  | Computational fluid dynamic          | NG   | Natural gas                                |
| CI   | Compression ignition                 | NOx  | Nitrogen oxides                            |
| CNG  | Compressed natural gas               | P    | In-cylinder Pressure                       |
| CO   | Carbon monoxide                      | PCCI | Premixed-charge compression-ignition       |
| Cp   | Heat capacity at a constant pressure | PLTC | Premixed low temperature combustion        |
| Cv   | Heat capacity at a constant volume   | PPRR | Peak pressure rise rate                    |
| DPF  | Diesel particulate filters           | PRF  | Primary reference fuel                     |
| DOE  | Design of Experiment                 | R    | Gas constant                               |
| EGR  | Exhaust gas recirculation            | RCCI | Reactivity-controlled compression-ignition |
| EPA  | Environmental Protection Agency      | RI   | Ringling intensity                         |
| EURO | European emission standard           | SCR  | Selective catalytic reduction              |

\* Corresponding Author.

Authors' Email Address: <sup>1</sup> M.R. Salmani Marasht (salmani.mohamadreza111@gmail.com), <sup>2</sup> S. A. Jazayeri (jazayeri@kntu.ac.ir),

<sup>3</sup> M. Ebrahimi (m.ebrahimi1353@gmail.com)



2345-4172/ © 2022 The Authors. Published by University of Isfahan

This is an open access article under the CC BY-NC-ND/4.0/ License (<https://creativecommons.org/licenses/by-nc-nd/4.0/>).



<http://dx.doi.org/10.22108/GPJ.2022.134161.1121>

|                               |   |          |                         |
|-------------------------------|---|----------|-------------------------|
| EVO                           | Exhaust valve opening                   | SOC      | Start of combustion     |
| GIE                           | Gross indicated efficiency              | SOI      | Start of injection      |
| H <sub>2</sub>                | Hydrogen                                | SOx      | Sulfur oxides           |
| H <sub>2</sub> O <sub>2</sub> | hydrogen peroxide                       | t        | Time                    |
| HCCI                          | Homogeneous-charge compression-ignition | T        | In-cylinder temperature |
| HRR                           | Heat release rate                       | TDC      | Top dead center         |
| ICE                           | Internal combustion engine              | UHC      | Unburned hydrocarbon    |
| IMEP                          | Indicated mean effective pressure       | $\gamma$ | Cp /Cv ratio            |
| IVC                           | Intake valve closing                    |          |                         |

## 1. Introduction

Heavy-duty diesel engines such as ICEs have been developed and used in many applications such as transportation, power generation, industrial, and so on due to their high efficiency. But, their applications are under tight restrictions by some important stringent emission standards and legislations, because of engine high emission levels which have adverse effects on human health and the environment. Therefore, these engines face many challenges in operation. In order to meet ever-increasing stiffer emission regulations on the aforementioned emissions, proposed by relevant organizations like the EPA and European emission standards, the present conventional diesel combustion needs a major upgrade to meet today's standards.

It should be noted important ICEs emissions are NO<sub>x</sub>, SO<sub>x</sub>, CO, UHC, Formaldehyde, and soot (CIMAC, 2008). The main factor in the NO<sub>x</sub> formation is the occurrence of high in-cylinder temperature in the engine combustion chamber. Thus, lowering the in-cylinder temperature would significantly affect the NO<sub>x</sub> level (CIMAC, 2008).

The SO<sub>x</sub> emission resulting from conventional fossil fuel consumption can be controlled by limiting the sulfur content in fuel as much as possible (CIMAC, 2008).

The CO, UHC, and Formaldehyde emissions are generally produced due to the incomplete combustion of fuels with carbon substances in an engine combustion chamber, especially in the cold regions near the engine cylinder wall and crevices (CIMAC, 2014). Recently, some researches show that these emissions levels can be reduced by improving the combustion characteristics such as the gaseous hydrocarbon fuel enrichment with hydrogen (Kakoe, Bakhshan, Motadayen Aval, & Gharehghani, 2018; Kalsi & Subramanian, 2017).

Moreover, the main source of soot formation is the occurrence of hydrocarbon fuel-rich areas in the engine combustion chamber (CIMAC, 2008). The soot emission level can be reduced by controlling the ignition timing. Using a longer ignition delay causes to create a better homogeneous mixture before the combustion initiation. Hence, it prevents the fuel-rich areas occurrence in the combustion chamber and reduces the soot level.

In the past decades, emission reduction technologies known as after-treatment systems have been employed by researchers (Reitz, & Duraisamy, 2015). Some of the conventional after-treatment systems are DPF, LNT, SCR, and so on. Of course, the use of these technologies meant a decrease in fuel efficiency, and an increase in the maintenance, extra operation, and installation costs of heavy-duty diesel engines (CIMAC, 2008). Therefore, the use of a new combustion strategy known as the PLTC strategy was proposed to overcome the challenge of after-treatment device employment (Reitz, & Duraisamy, 2015). The HCCI, PCCI, and RCCI combustion strategies are the known types of the PLTC strategy.

Initially, the HCCI combustion strategy was introduced as an easy way to achieve lower NO<sub>x</sub> and soot emissions levels in CI engines that operate under conventional diesel combustion (Dempsey, Walker, Gingrich, & Reitz, 2014). Generally, in an HCCI engine, a homogeneous air-high reactive fuel mixture is induced to the engine cylinder prior to the combustion initiation during the intake stroke. Thus, the occurrence of hydrocarbon fuel-rich regions in the engine combustion chamber is completely prevented and the soot level is reduced, drastically (CIMAC, 2008). Also, in an HCCI engine, the maximum in-cylinder temperature will be below 1900 K, thus, the NO<sub>x</sub> level will also be reduced significantly. It should be noted that in the HCCI combustion strategy, a desirable engine output power is controlled by the equivalence ratio factor. Moreover, the thermodynamic conditions of gas composition inside the combustion chamber such as in-cylinder temperature and pressure could also be controlled by this factor (Reitz, & Duraisamy, 2015). But, the main challenges of an HCCI engine are controlling the combustion phasing and duration, especially at high loads also high levels of CO and UHC emissions (Reitz, & Duraisamy, 2015).

In order to overcome the HCCI combustion strategy challenges, the PCCI combustion strategy was proposed (Duan, Jia, Li, & Wang, 2021; Hardy & Reitz, 2006). In a PCCI engine, instead of inducing a homogeneous air-high reactive fuel mixture during the intake stroke, a highly reactive fuel is injected to coincide with the compression stroke to improve the

combination of the air-fuel mixture. Unfortunately, this combustion strategy also suffers from controlling the rate of heat release and the combustion phasing and also high levels of CO and UHC emissions.

Therefore, in order to overcome the challenges of the two aforementioned combustion strategies, the RCCI combustion strategy was introduced (Kokjohn, Hanson, Splitter, Kaddatz, & Reitz, 2011). In this strategy, the combination of two fuels with different reactivity (low and high reactive fuels) is used. Thus, in an RCCI engine, the ratio of two fuels with different reactivity which are introduced through different fuel delivery systems is used to control the combustion phasing and the spatial stratification between the two fuels is also employed to control the combustion duration. Generally, in this mode of combustion, a low-reactive fuel such as natural gas or gasoline is entered into the combustion chamber through fuel injection into the intake port. Therefore, a mixture of air and low-reactive fuel is formed in the combustion chamber. After this stage, a highly reactive fuel like diesel fuel is directly injected into the combustion chamber. Thus, better control over the combustion phase and also engine emissions is achievable (Kokjohn, Hanson, Splitter, Kaddatz, & Reitz, 2011).

Since 2011, a wide variety of fuels with different reactivity were used in RCCI engines such as gasoline/ diesel fuel (Kokjohn, Hanson, Splitter, Kaddatz, & Reitz, 2011), hydrated ethanol/diesel fuel (Dempsey, Adhikary, Viswanathan, & Reitz, 2012), natural gas/ biodiesel fuel (Gharehghani, Hosseini, Mirsalim, & Jazayeri, 2015), natural gas/ diesel fuel (Walker, Wissink, DelVescovo, & Reitz, 2015; Ebrahimi, Najafi, Jazayeri, & Mohammadzadeh, 2018; Nieman, Dempsey, & Reitz, 2012; Hamdi, Agrebi, Idrissi, Mondo, Labiadh, Sadiki, & Chrigui, 2022), methanol/ diesel fuel, ethanol/ diesel fuel, n- butanol/ diesel fuel (Zou, Wang, Zheng, Reitz, & Yao, 2016), isobutanol/ isobutanol with the addition of di-Tert butyl peroxide (DelVescovo, Wang, Wissink, & Reitz, 2015), and so on.

Although crude oil resources are limited, in contrast, the resources of natural gas known as the cleanest hydrocarbon fuel (i.e. low-carbon hydrocarbon gaseous fuel) are abundant all over the world. As shown in Figure 1, based on the U.S. AEO 2022 forecast, among the different energy sources, the use of natural gas as an energy source will increase through 2050, significantly. Therefore, these days, in the RCCI combustion field, in many experimental and simulation studies, among low reactive fuels, natural gas is of a great degree of importance among researchers (AEO, 2022). Generally, natural gas consists of some important

components like methane, nitrogen, carbon dioxide, ethane, propane, and so on. Of course, among the mentioned components, the dominant volumetric percentage is methane (approximately 89% by volume).

In RCCI engines fueled with natural gas and diesel fuel, the engine efficiency would be improved and a further reduction in the engine emission like NOx and soot would be possible, but, these engines still suffer from other important emissions like unburned methane, Formaldehyde, and CO. Because, in RCCI engines fueled with natural gas and diesel fuel, during the intake stroke, natural gas is injected into the engine intake port to form a pre-mixed air-low reactive fuel mixture in the engine cylinder. Hence, natural gas will be trapped in the engine crevice areas during the engine compression stroke, and the main sources of the formation of unburned methane, CO, and Formaldehyde emissions will be created due to occurring incomplete combustion process and the wall quenching effects near the engine cylinder wall (CIMAC, 2014).

Also, other low reactive fuels like Alcohol (Adzuan & Yusop, 2022), LFG (Ebrahimi & Jazayeri, 2019; Kokabi, Najafi, Jazayeri, & Jahanian, 202), biogas (Asadollahzadeh, Hamed, & Jazayeri, 2020), biomethane (Baškovič, Vihar, Oprešnik, Seljak, & Katrašnik, 2022), CNG (Aydin, 2021; Harari, Yaliwal, & Banapurmath, 2021), LPG (Elkelawy, Shenawy, Mohamed, Elarabi, & Bastawissi, 2022), and natural gas enriched with hydrogen or syngas in the RCCI mode of combustion (Mabadi Rahimi, Jazayeri, & Ebrahimi, 2021; Kakoe, Bakhshan, Motadayen Aval, & Gharehghani, 2018; Sattarzadeh, Ebrahimi, Jazayeri, 2022) has been studied extensively.

#### Energy consumption by fuel

##### AEO2022 Reference case

quadrillion British thermal units

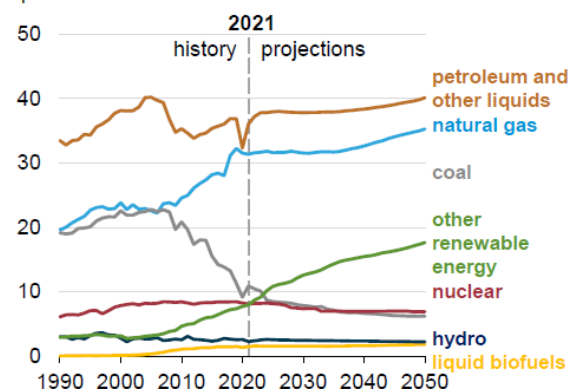


Figure 1: The energy production forecast (AEO, 2022).

Moreover, in this field, several types of heavy-duty and light-duty diesel engines were examined

in order to improve their performance and reduce their emission levels (Khatamnejad, Khalilarya, Jafarmadar, & Mirsalim, 2017; Nieman, Dempsey, & Reitz, 2012; Gharehghani, Hosseini, Mirsalim, & Jazayeri, 2015; Aydin, 2021; Harari, Yaliwal, & Banapurmath, 2021).

One of these heavy-duty diesel engines is the Iranian national heavy-duty diesel engine, DESA 150-12V or D87 (DESA, 2019). This 12-cylinder V-type engine was designed for application in marine, railway, and power generation. The engine output power as conventional pure diesel combustion is 1000 kW and that for dual-fuel mode of combustion fueled with natural gas and diesel fuel is 850 kW (DESA, 2019).

Considering that the D87 engine is under its durability test, some limited studies have been conducted to assess the engine performance analysis. In the D87 engine operation under conventional diesel combustion, the effects of some important parameters such as diesel fuel injection timing, diesel fuel injection pressure, and the amount of diesel fuel mass on the combustion characteristics and the engine emissions were investigated (Jafari & Seddiq, 2019). Also, in the same engine under dual fuel mode of combustion, the effect of the number of diesel fuel nozzle holes and exhaust gas recirculation on the engine performance was assessed (Jafari & Domiri Ganji, 2021; Jafari, Domiri Ganji, & Mirsalim, 2013). Moreover, the effect of diesel fuel injection on the D87 engine performance and emissions under RCCI combustion fueled with diesel fuel/toluene/poly-aromatic hydrocarbons (PAH) was evaluated (Jafari & Seddiq, 2021). Recently, the performance of the D87 engine was also analyzed under RCCI combustion fueled with LFG and diesel fuel (Karbasi, Jazayeri, & Ebrahimi, 2022).

Based on studies that were conducted on the D87 engine and according to the RCCI combustion advantages in the engine performance improvement and the engine emissions reduction and also the demand for using natural gas as the cleanest fuel among the conventional hydrocarbon fuels, the current study; the DOE concept-Factorial method is employed to obtain the D87 engine appropriate operating conditions under RCCI mode of combustion fueled with diesel fuel and natural gas. The D87 engine operation is simulated through the AVL FIRE CFD tool coupled with the CHEMKIN chemistry tool. For implementing the DOE concept in the RCCI combustion simulation, six effective engine input parameters were selected including the IVC pressure, the IVC temperature, the diesel fuel SOI timing, the engine speed, the natural gas/diesel fuel mass ratio, and the effective compression ratio. The goals of this study are to maintain the D87

engine output power under RCCI combustion with satisfying the LTC concept, improve the combustion characteristics, and reduce the engine emission levels without engine exposure to diesel knock.

## 2. D87 Heavy-Duty Diesel Engine Specifications and Computational Model

The D87 engine under study its overview is depicted in Figure 2 is a designed Iranian national heavy-duty diesel engines family which can operate under conventional diesel combustion mode and also dual fuel mode of combustion fueled with diesel fuel and natural gas at a constant speed of 1500 rpm (DESA, 2019). The D87 engine's IMEP in the dual-fuel mode of combustion is 13.65 bar with a thermal efficiency of 38%. The D87 engine's technical specifications are listed in Table 1 (DESA, 2019).




Figure 2: An overview of Iranian national heavy-duty diesel engine (D87) on the test bed (Jafari, Domiri Ganji, & Mirsalim, 2013).

In this study, in order to simulate the RCCI mode of combustion in the D87 engine fueled with diesel fuel and natural gas, the AVL FIRE CFD tool coupled with the CHEMKIN tool is used. The used three-dimensional computational models for conducting the combustion simulation are presented in Figure 3.

Moreover, in order to assess the computational mesh independency and obtain the proper number of cells in the 3D computational model, several different average cell sizes were examined, as listed in Table 2. For each considered average cell size in Table 2, the difference between the in-cylinder peak pressure obtained in the RCCI combustion simulation and the D87 engine experimental data (i.e. 106.76 bar) is evaluated and depicted in Figure 4 (Jafari, Domiri Ganji, & Mirsalim, 2013).

**Table 1: DESA 150-12V (D87) heavy-duty diesel engine specifications (DESA, 2019).**


|                                       |                |
|---------------------------------------|----------------|
| Displacement                          | 38.1 L         |
| Bore x Stroke                         | 150 mm x180 mm |
| Connecting rod length                 | 282 mm         |
| Engine speed                          | 1500 rpm       |
| Number of intake/Exhaust valves       | 2              |
| IVC timing                            | -150° ATDC     |
| EVO timing                            | 125° ATDC      |
| <b>D87 Conventional Diesel Engine</b> |                |
| Compression ratio                     | 15:1           |
| Diesel fuel injection mechanism       | Common rail    |
| Diesel fuel injector holes number     | 6              |
| Injector hole diameter                | 290 $\mu$ m    |
| Included spray angle                  | 140°           |
| Rated power                           | 1000 kW        |
| <b>D87 Dual Fuel Engine</b>           |                |
| Compression ratio                     | 11.5:1         |
| Rated power                           | 850 kW         |

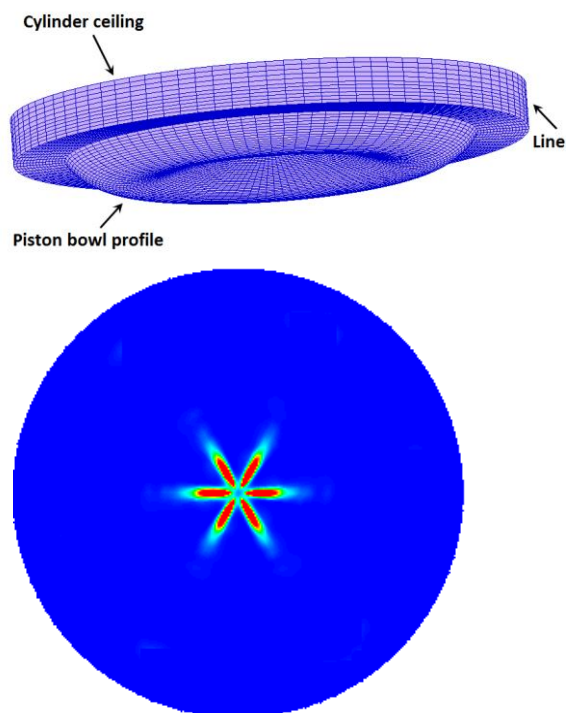**Figure 3: Three-dimensional computational grids of the D87 engine combustion and a top view of the diesel fuel spray axis.**

As depicted in Figure 4, adopting the average cell sizes less than 1.8 mm, i.e. 68880 cells at the TDC, would not lead to any more accurate simulation results, but, it would increase the computation time unnecessarily. Therefore, in the present work, the average cell size of 1.8 mm is used to conduct the D87 engine combustion simulation.

**Table 2: Different average cell sizes and the relevant number of cells at the TDC**

| mesh average cell size (mm) | Number of cells at the TDC |
|-----------------------------|----------------------------|
| 1.2                         | 166776                     |
| 1.5                         | 91224                      |
| 1.8                         | 68880                      |
| 2.0                         | 10104                      |
| 2.3                         | 52632                      |
| 2.6                         | 42936                      |

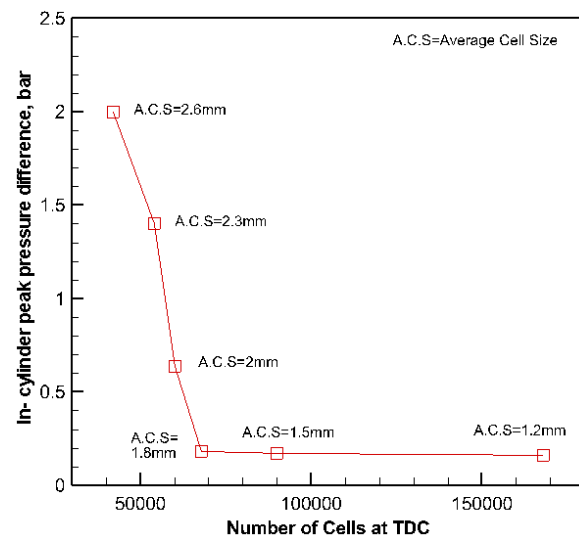**Figure 4: The 3D computational mesh independency assessment.**

Since the D87 engine under the dual-fuel mode of combustion uses NG and diesel fuel, thus, these two fuels with different reactivity are also used in the D87 engine operation under the RCCI mode of combustion. Of course, in the present simulation study, in order to use a reduced PRF mechanism to predict all chemical reactions between NG and diesel fuel, Methane and N-heptane are considered to be representative of NG and diesel fuel, respectively. The lower heating value of methane is 50 MJ/kg and that of n-heptane is 44.6 MJ/kg. Hence, an optimized reduced PRF mechanism including 76 species and 464 reactions is selected to predict the reactions between the two mentioned fuels (Rahimi, Fatehifar, & Khoshbakhti Saray, 2010). Also, in order to model the diesel fuel spray, some sub-models which were used are as follows:

- The turbulence dispersion model (Gosman & Ioannides, 1983) for modeling the interaction of the particles with the individual turbulent eddies.
- The wall jet model (Naber & Reitz, 1988) for modeling the diesel fuel spray-wall interaction.
- Dukowicz model (Dukowicz, 1979) for modeling the diesel fuel droplet evaporation.
- The wave standard model for modeling the diesel fuel droplet break-up (Liu & Reitz, 1993).
- The diesel nozzle model (Kunsberg-Sarre, Kong, & Reitz, 1999) for simulating the nozzle

flow such as injection velocities and initial droplet diameters due to cavitation.


The D87 engine operating setup under the dual-fuel mode of combustion fueled with diesel fuel-NG indicated in Table 3 is considered. The mathematical modeling simulation is validated by the experimental data available by DESA for in-cylinder pressure variation as presented in Figure 5 (Jafari, Domiri Ganji, & Mirsalim, 2013).

**Table 3: D87 engine input setup data for validation purposes (Jafari, Domiri Ganji, & Mirsalim, 2013).**

| Parameter type                                 | Value |
|--|-------|
| Gross IMEP (bar)                               | 13.65 |
| Intake Pressure (bar)                          | 1.7   |
| Intake Temperature (K)                         | 338   |
| Diesel fuel mass per each cycle (mg)           | 46.5  |
| Natural gas (Methane) mass per each cycle (mg) | 173.6 |
| Total fuel mass per each cycle (mg)            | 220.1 |
| Diesel fuel SOI (° ATDC)- Dual-fuel mode       | -22   |
| EGR percentage (%)                             | 0     |

As shown in Figure 5, the developed simulation model has the potential to predict the D87 engine in-cylinder pressure trace, accurately. Also, as presented in Table 4, the reduction in the obtained gross IMEP and the GIE resulted from implementing the dual-fuel combustion mode compared to that of the D87 engine experimental result is less than 1.6% and 0.7%, respectively (Jafari, Domiri Ganji, & Mirsalim, 2013).

As mentioned earlier, in the RCCI combustion strategy, two fuels with different reactivity are used. Generally, in this strategy initially low reactive fuel like NG mixed with intake air enters the cylinder, this is followed by a highly reactive fuel like diesel fuel which is directly injected into the engine combustion chamber earlier compared to conventional diesel engine.

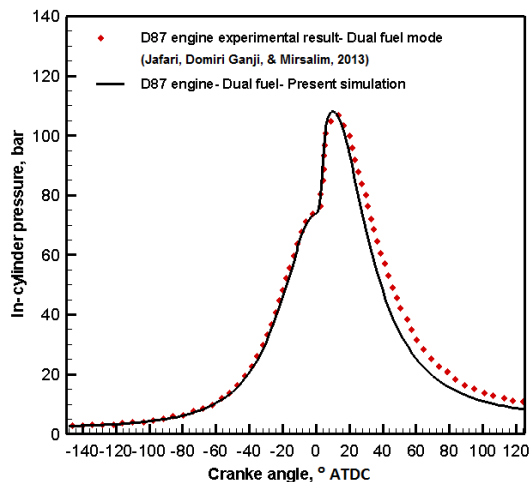


**Figure 5: The D87 engine in-cylinder pressure in dual-fuel mode for validation purpose.**

**Table 4: The D87 engine gross IMEP and GIE for validation purpose (Jafari, Domiri Ganji, & Mirsalim, 2013).**

| Combustion type   | Gross IMEP (bar) | GIE (%) |
|---|------------------|---------|
| Dual-fuel engine (Jafari, Domiri Ganji, & Mirsalim, 2013) | 13.65            | 40      |
| Dual-fuel combustion simulation (Present work)            | 13.44            | 39.75   |
|   | Error            | Error   |
|   | 1.54%            | 0.63%   |

This is because in the RCCI mode of combustion, the main combustion will be initiated due to the reactions between some important species in the combustion chamber such as hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>), formaldehyde (CH<sub>2</sub>O), and hydroxyl (OH radical) (Reitz & Duraisamy, 2015). Therefore, in order to implement the RCCI combustion strategy in the D87 engine fueled with diesel fuel and natural gas, by using the D87 engine operating conditions mentioned in Table 3, the diesel fuel SOI is advanced and set at -45° ATDC. The D87 engine in-cylinder pressure resulting from the RCCI combustion simulation is shown in Figure 6 and compared with the experimental data (Jafari, Domiri Ganji, & Mirsalim, 2013). The result shows that not only the engine under investigation can optimally operate under RCCI combustion, but also, the D87 engine gross IMEP and GIE improves more than 6% and 7%, respectively, as listed in Table 5.

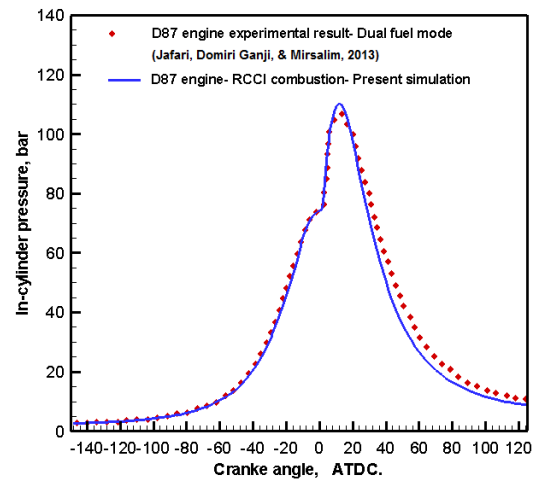

**Figure 6: The D87 engine in-cylinder pressure under RCCI mode of combustion fueled with diesel fuel and natural gas.**

**Table 5: The D87 engine gross IMEP and GIE for validation purpose (Jafari, Domiri Ganji, & Mirsalim, 2013).**

| Combustion type   | Gross IMEP (bar) | GIE (%)        |
|---|------------------|----------------|
| Dual-fuel engine (Jafari, Domiri Ganji, & Mirsalim, 2013) | 13.65            | 40             |
| RCCI combustion simulation (Present work)                 | 14.58            | 43.13          |
|   | Enhanced 6.81%   | Enhanced 7.83% |

### 3. The DOE Concept- Factorial Method

For implementing the DOE concept- Factorial method in the D87 engine performance evaluation under RCCI mode of combustion, the effects of several effective input parameters on the engine performance are evaluated. In the current study, six effective input parameters, namely, the IVC pressure and temperature, the diesel fuel SOI timing, the engine speed, the natural gas/diesel fuel mass ratio, and the effective compression ratio are selected. It should be noted that the main objective of the present work is to find appropriate initial conditions to maintain the D87 engine output power under RCCI combustion while satisfying the LTC concept, improving the combustion characteristics, and reducing the engine emission levels without the engine being exposed to diesel knock.

Based on the D87 engine operating conditions (Jafari, Domiri Ganji, & Mirsalim, 2013), five levels for the six selected input parameters are chosen as presented in Table 6.

**Table 6: Selected input parameters at five levels.**

| Input Parameters                                     | Level Number |       |       |       |       |
|--|--------------|-------|-------|-------|-------|
|  | 0            | 1     | 2     | 3     | 4     |
| IVC P (bar)  | 2.3          | 2.4   | 2.5   | 2.6   | 2.7   |
| IVC T (K)  | 340          | 350   | 370   | 390   | 400   |
| SOI timing (° ATDC)                                  | -30          | -40   | -50   | -60   | -70   |
| Engine Speed (rpm)                                   | 1000         | 1300  | 1500  | 1600  | 1800  |
| Effective compression ratio (or IVC timing) (° ATDC) | -154         | -152  | -150  | -148  | -146  |
| NG/diesel fuel mass ratio                            | 50/50        | 60/40 | 70/30 | 80/20 | 90/10 |

Basically, for implementing the full factorial method, when five levels for the six selected input parameters are considered, a total of 15625 (i.e. 5X5X5X5X5X5) treatment combinations have to be examined. But, in the present work, some limited numbers of combinations are randomly chosen and used for the RCCI combustion simulation in the D87 engine.

## 4. Results and Discussion

### 4.1. The Misfire Occurrence Assessment

In an RCCI engine that uses n-heptane (i.e. diesel fuel) as a normal chain hydrocarbon fuel, the cool flame known as the CA10 generally takes place coincidence with direct diesel fuel injection into the combustion chamber about 10-20° CA before the SOC (Ando & Yasuyuki, 2009). Moreover, in an RCCI engine fueled with a normal chain hydrocarbon fuel, H<sub>2</sub>O<sub>2</sub> plays a key

role in oxidizing this type of fuel. H<sub>2</sub>O<sub>2</sub> initiates to form coincident with the CA10 occurrence. The H<sub>2</sub>O<sub>2</sub> loop reactions which are exothermic reactions cause enough heat will be accumulated in the engine combustion chamber and the SOC is initiated (Ando & Yasuyuki, 2009). Advancing the diesel fuel SOI timing causes that due to further effects of combustion air swirl on the diesel fuel spray, the concentration of diesel fuel-rich zone is reduced. Thus, the amount of fuel energy released in the CA10 stage is also reduced due to further dispersion of diesel fuel and its penetration into the available air-methane mixture. Hence, the result of advancing the diesel fuel SOI timing and the reduction of the amount of fuel energy released in the CA10 stage is that the start of the main combustion will be hampered.

In the present study, based on the DOE concept, the D87 engine's combustion simulation results show that for the engine speed between 1300 and 1800 rpm, when the diesel fuel SOI timing is advanced to more than -50° ATDC and the diesel fuel/NG mass ratio is also reduced to less than 50/50, the thermodynamic conditions is not right for initiation of the main combustion, thus, the D87 engine operation leads to the misfire occurrence.

### 4.2. The Diesel Knock Occurrence Assessment

Based on Eng research (Eng, 2002), the RI can be considered as a criterion that leads to the occurrence of diesel knock in a diesel engine. Generally, diesel knock occurs when the fuel energy is released very fast into the engine combustion chamber. This matter causes the PPRR in the engine cylinder increases, drastically. Therefore, a heavy-duty diesel engine operation will be exposed to excessive combustion noise known as diesel knock. This phenomenon causes damage to engine parts which should be avoided. A diesel engine operation is not the exposure to diesel knock when the PPRR or the RI values are below 15bar/° CA and 5 MW/m<sup>2</sup>, respectively (Eng, 2002). In order to calculate the RI value, the same expression presented by Eng can be used (Eng, 2002).

$$RI = \frac{1}{2\gamma} \frac{(0.05(dP/dt)_{max})^2}{P_{max}} \sqrt{\gamma R T_{max}} \quad (1)$$

In this equation, (dP/dt)<sub>max</sub> is the PPRR, P<sub>max</sub> is the maximum in-cylinder pressure, and T<sub>max</sub> is the maximum in-cylinder temperature.

According to the DOE concept, the RCCI combustion simulation results show that by decreasing the engine speed compared to the experimental conditions along with increasing the diesel fuel mass share up to 90%, the D87 engine operation is vulnerable to diesel knock. Also, by increasing the intake charge

temperature to more than 380K along with increasing the engine speed relevant to the experimental conditions could easily lead to diesel knock occurrence.

#### 4.3. The Low-Temperature Combustion Concept Assessment

Since the RCCI combustion strategy is known as the LTC strategy, thus, the maximum in-cylinder temperature should be below 1900 K (Reitz, & Duraisamy, 2015). By implementing the DOE concept, the D87 operation simulation results illustrate that in different engine speeds and effective compression ratios, when the diesel fuel mass share increases to more than 40% versus the natural gas mass share, increasing the intake charge temperature to more than 390 K leads to increase the peak in-cylinder temperature to more than 1900 K. Although the D87 engine operation is not exposed to diesel knock, the LTC concept is not fulfilled. Thus, the engine operation under these conditions is undesirable.

#### 4.4. The Desirable Situation for the D87 Engine Operation


By detailed assessment of six engine input parameters mentioned in Table 6, the simulation results show that in different scenarios the effective compression ratios, and the engine operation adjustment under the initial conditions listed in Table 7 leads to the desirable engine operation. It should be noted that under these mentioned conditions, the diesel fuel mass share reduction compared to the natural gas mass share is not an obstacle to obtain the desired engine performance. However, the obtained desirable NG/diesel fuel mass ratio is between 70/30 and 90/10. It is important that as mentioned earlier, for this proposed range of the NG/diesel fuel mass ratio, the diesel fuel SOI timing should be limited to below  $-50^\circ$  ATDC to avoid misfire occurrence.

**Table 7: The obtained desirable initial conditions.**


| Input parameters            | Selected input parameter range |         |
|-----------------------------|--------------------------------|---------|
|                             | Minimum                        | Maximum |
| IVC Pressure (bar)          | 2.3                            | 2.7     |
| IVC Temperature (K)         | 350                            | 380     |
| SOI timing ( $^\circ$ ATDC) | -30                            | -50     |
| Engine Speed (rpm)          | 1300                           | 1600    |
| NG/Diesel fuel mass ratio   | 70/30                          | 90/10   |

For the mentioned desirable conditions, the results for the D87 engine's IMEP and the GIE are depicted in Figure 7. As shown in this figure, for five desirable cases, the maximum loss in the engine power is approximately 17% compared to

the dual-fuel mode of combustion experimental data (i.e. 13.65 bar) (Jafari, Domiri Ganji, & Mirsalim, 2013). At the same time, the GIE is more than the experimental data (i.e. 40%) (Jafari, Domiri Ganji, & Mirsalim, 2013). Moreover, for these desirable conditions, the PPRR values and the calculated RIs are depicted in Figure 8. As shown, in the D87 engine operation under the mentioned conditions in Table 6, the engine will not be exposed to the diesel knock occurrence.

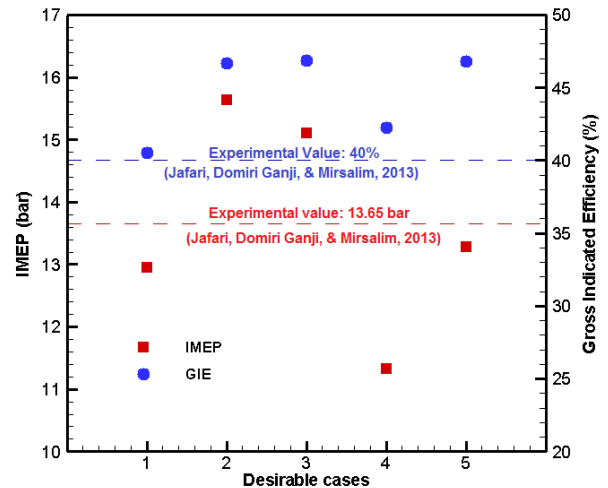

**Figure 7: The D87 engine output power and GIE for the obtained desirable conditions.**

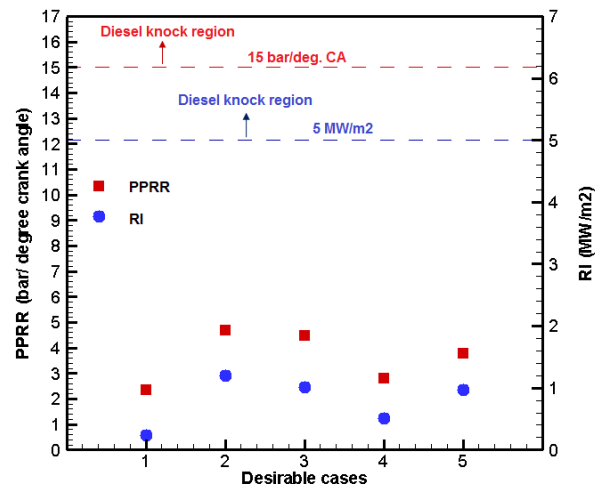

**Figure 8: The PPRR and the RI values for the obtained desirable conditions.**

#### 4.5. The CA50 and Combustion Duration

The CA50 as an important combustion characteristic is the crank angle which 50% of the fuel energy is released into the engine combustion chamber. As depicted in Figure 9, the CA50 for the obtained desirable conditions takes place after the TDC. Therefore, the negative work resulting from the fuel energy release prior to the TDC, during the compression stroke, decreases.



Another important combustion characteristic is the combustion duration. In the RCCI combustion strategy that uses two fuels, a highly reactive fuel such as diesel fuel is used to supply the required energy for the combustion initiation. On the other hand, the combustion will be extended due to the presence of low reactive fuel. Hence, in the present study, by using natural gas as a low-reactive fuel in the D87 RCCI engine, it is expected that the combustion duration increases with the gradual release of natural gas energy. For the obtained desirable cases, the average combustion duration is about 31° crank angle.

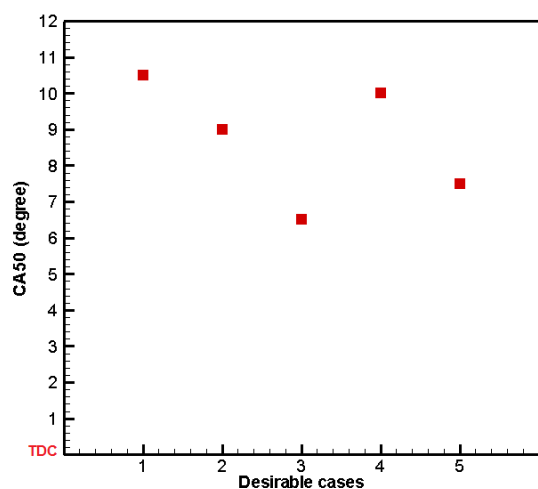


Figure 9: The CA50 for the obtained desirable conditions.

#### 4.6. The D87 Engine Emission Evaluation

For all five relevant desirable cases, the D87 engine emissions are assessed. Figure 10 shows NOx and CO emissions results. In the D87 heavy-duty diesel engine under RCCI combustion fueled with diesel fuel and natural gas, the simulation results based on the DOE concept show that the NOx emission level gets close to the EURO V level (i.e. 2 g/kWh). At the same time, the CO emission level gets close to the EURO VI level (i.e. 1.5 g/kWh).

The UHC and Formaldehyde emissions are also depicted in Figure 11. As shown in Figure 11, for the mentioned desirable conditions, the UHC emission level is far from the EURO VI level (i.e. 0.13 g/kWh) and the Formaldehyde emission level as a carcinogenic emission is far from the EPA 2007 level (i.e. 0.012 g/kWh).

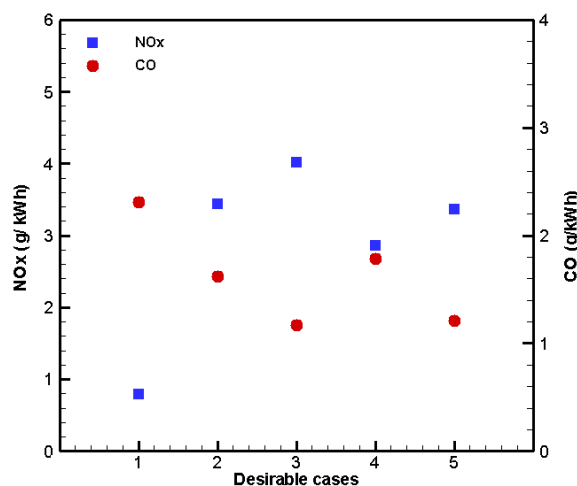


Figure 10: NOx and CO emissions for the obtained desirable conditions.

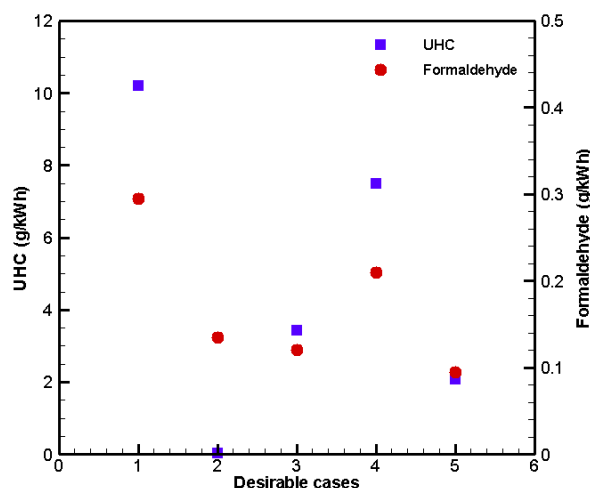


Figure 11: The UHC and Formaldehyde emissions for the obtained desirable conditions.

#### Conclusions

The present study aims to evaluate the performance of the Iranian national heavy-duty diesel engine (D87) under the RCCI combustion strategy fueled with diesel fuel and natural gas based on the DOE concept-Factorial method. The effect of six of the engine input parameters on the combustion characteristics and emissions were assessed. The selected input parameters are the IVC pressure, the IVC temperature, the diesel fuel SOI timing, the engine speed, the natural gas/diesel fuel mass ratio, and the effective compression ratio. Thus, in order to improve the D87 engine performance and combustion characteristics of D87, the following results can be derived.

1) The D87 engine operation leads to the misfire when at the engine speed between 1300 and 1800 rpm, the diesel fuel SOI timing is advanced to more than -50° ATDC, and the diesel fuel/NG mass ratio is also reduced to less than

50/50.

2) Under two different conditions, the D87 engine operation will be the exposure to diesel knock: (a) when the diesel fuel mass share is increased up to 90% along with decreasing the engine speed compared to the experimental conditions and (b) the intake charge temperature is raised to more than 380 K along with increasing the engine speed compared to the experimental conditions.

3) In contrast to the engine speeds and effective compression ratios, increasing the diesel fuel mass share to more than 60% versus the natural gas mass share and increasing the intake charge temperature to more than 390 K have significant effects on the LTC concept violation.

4) Compared to the dual-fuel mode of combustion, by operating the D87 engine under RCCI combustion, at various effective compression ratios, considering the IVC pressure between 2.3 and 2.7 bar, the IVC temperature between 350 and 380 K, the diesel fuel SOI timing between -30 and -50 ° ATDC, the NG/diesel fuel mass ratio between 70/30 and 90/10, and the engine speed between 1300 and 1600 rpm cause to improve the GIE to more than 40%. At the same time, the maximum loss in the D87 engine power is approximately not more than 17% compared to the dual-fuel mode of combustion experimental data.

5) Under the desirable conditions for the D87 engine, the CA50 takes place after the TDC. Thus, along with the reduction in negative work resulting from the fuel energy release prior to the TDC, the average combustion duration is about 31° crank angle.

6) Based on the proposed desirable situations for the D87 engine operation, the NO<sub>x</sub> emission level gets close to the EURO V level, and at the same time, the CO emission level gets close to the EURO VI level. But, the UHC emission level is far from the EURO VI level, and also the Formaldehyde emission level is far from the EPA 2007 level.

The D87 engine, 12-cylinder V-type engine, which is designed with the developed strategy, would lead to achieve the optimal application in marine, railway, and power generation purposes, can satisfactorily operate under conventional diesel combustion and also under the dual-fuel mode of combustion. In recent years, along with the significant success of RCCI combustion in reducing engine emissions, the reduction of hydrocarbon fuel consumption was also considered by the researchers. Thus, in order to the maximum reduction in hydrocarbon fuels consumption as the largest source of greenhouse gas emissions, the use of the RCCI combustion strategy in the D87 engine fueled with other renewable fuels such as landfill gas, biogas, hydrogen, syngas, and so on is suggested to reduce the engine emissions and also save the hydrocarbon fuels resources.

## References

- Ando, H, & Yasuyuki, S. (2009). Universal Rule of Hydrocarbon Oxidation, *SAE Paper*, 01, 0948.
- Adzuan, MA, & Yusop, AF. (2022). review of dual fuel RCCI engine fundamental and effect on the performance, combustion and emission characteristic. *AIP Conference Proceedings*, 2465, 04000. <https://doi.org/10.1063/5.0078962>.
- Annual energy outlook 2022 with projection to 2050, U.S. Energy Information Administration, March 3, 2022, [www.eia.gov](http://www.eia.gov).
- Asadollahzadeh, P, Hamed, MH, & Jazayeri, SA. (2020). Investigation of biogas composition effects on combustion characteristics of an RCCI engine. *Gas Processing Journal*, 8(2), 61-67. <http://dx.doi.org/10.22108/gpj.2021.121028.1078>.
- Aydin, H. (2021). An innovative research on variable compression ratio in RCCI strategy on a power generator diesel engine using CNG-safflower biodiesel. *Energy*, 231, 121002. <https://doi.org/10.1016/j.energy.2021.121002>.
- Ahmadi, R, & Hosseini, SM. (2018). Numerical investigation on adding/substituting hydrogen in the CDC and RCCI combustion in a heavy duty engine. *Applied Energy*, 213, 450-468. <https://doi.org/10.1016/j.apenergy.2018.01.048>.
- Ansari, E, Shahbakhti, M, & Naber, J. (2018). Optimization of performance and operational cost for a dual mode diesel-natural gas RCCI and diesel combustion engine. *Applied Energy*, 231, 549-56. <https://doi.org/10.1016/j.apenergy.2018.09.040>.
- Baškovič, UZ, Vihar, R, Oprešnik, SR, Seljak, T, & Katrašnik, T. (2022). RCCI combustion with renewable fuel mix – Tailoring operating parameters to minimize exhaust emissions. *Fuel*, 311, 122590. <https://doi.org/10.1016/j.fuel.2021.122590>.
- CIMAC (International Council on Combustion Engines) Guide to Diesel Exhaust Emissions Control of NO<sub>x</sub>, SO<sub>x</sub>, Particulates, Smoke and CO<sub>2</sub>, 2008.
- CIMAC, the International Council on Combustion Engines. Methane and Formaldehyde Emissions of Gas Engines, *CIMAC position paper WG 17*, 2014-04.
- Dalha, I, Said, M, Abdul karim, A, & El-Adawy, M. (2021). Effects of port mixing and high carbon dioxide contents on power generation and emission characteristics of biogas-diesel RCCI combustion. *Applied Thermal Engineering*, 198, 117449. <https://doi.org/10.1016/j.applthermaleng.2021.117449>.
- DESA, IRAN Heavy-Duty Diesel Engine Company Documents, Proceedings of Second National Congress of Internal Combustion, Babol Noshirvani University 2019.
- DelVescovo, D, Wang, H, Wissink, M, & Reitz, RD. (2015). Isobutanol as Both Low Reactivity and High Reactivity Fuels with addition of Di-Tert Butyl Peroxide (DTBP) in RCCI Combustion. *SAE Int. J. Fuels Lubr.*, 8(2), 329-343.
- Dempsey, AB, Walker, NR, Gingrich, E, & Reitz, RD. (2014). Comparison of Low Temperature Combustion Strategies for Advanced Compression

- Ignition Engines with a Focus on Controllability, *Combustion Science and Technology*, 186(2), 210-241, doi:10.1080/00102202.2013.858137.
- Duraisamy, G, Rangasamy, M, & Govindan, N. (2020). A comparative study on methanol/diesel and methanol/PODE dual fuel RCCI combustion in an automotive diesel engine. *Renewable Energy*, 145, 542-556. <https://doi.org/10.1016/j.renene.2019.06.044>.
- Dukowicz, JK. (1979). Quasi-Steady Droplet Change in the Presence of Convection. *Informal report Los Alamos Scientific Laboratory*, LA7997-MS1979. <https://doi.org/10.2172/6012968>.
- Dempsey, AB, Adhikary, B Das, Viswanathan, S, Reitz, RD. (2012). Reactivity Controlled Compression Ignition (RCCI) using Premixed Hydrated Ethanol and Direct Injection Diesel. *J. Eng. Gas Turbines Power*, 134, 082806. <https://doi.org/10.1115/1.4006703>.
- Duan, H, Jia, M, Li, Y, & Wang, T. (2021). A comparative study on the performance of partially premixed combustion (PPC), reactivity-controlled compression ignition (RCCI), and RCCI with reverse reactivity stratification (R-RCCI) fueled with gasoline and polyoxymethylene dimethyl ethers (PODEn). *Fuel*, 298, 120838. <https://doi.org/10.1016/j.fuel.2021.120838>.
- Ebrahimi, M, & Jazayeri, SA. (2019). Effect of hydrogen addition on RCCI combustion of a heavy duty diesel engine fueled with landfill gas and diesel oil. *International Journal of Hydrogen Energy*, 44(14), 7607-7615. <https://doi.org/10.1016/j.ijhydene.2019.02.010>.
- Ebrahimi, M, Najafi, M, Jazayeri, SA, & Mohammadzadeh, AR. (2018). A Detail Simulation of Reactivity Controlled Compression Ignition Combustion Strategy in a Heavy Duty Diesel Engine Run on Natural Gas/ Diesel Fuel. *International journal of engine research*, 19 (7), 774-789. <https://doi.org/10.1177/1468087417730486>.
- Ebrahimi, M, Najafi, M, & Jazayeri, SA. (2020). Multi-input multi-output optimization of reactivity-controlled compression-ignition combustion in a heavy-duty diesel engine running on natural gas/diesel fuel. *International Journal of Engine Research*, 21(3), 470-483. <https://doi.org/10.1177/1468087419832085>.
- Ebrahimi, M, Najafi, M, & Jazayeri, SA. (2018). Artificial Neural Network to Identify RCCI Combustion Mathematical Model for a Heavy Duty Diesel Engine Fueled with Natural Gas and Diesel Oil. *J Braz. Soc. Mech. Sci. Eng.*, 40(9), 1-12. doi: 10.1007/s40430-018-1328-9.
- Elkelawy, M, Shenawy, EAE, Mohamed, SA, Elarabi, MM, & Bastawissi, HAE. (2022). Impacts of using EGR and different DI-fuels on RCCI engine emissions, performance, and combustion characteristics. *Energy Conversion and Management*, 15, 100236. <https://doi.org/10.1016/j.ecmx.2022.100236>.
- Eng, JA. (2022). Characterization of pressure waves in HCCI combustion. *SAE Technical Paper*; 01-2859. <https://doi.org/10.4271/2002-01-2859>.
- Gosman, AD, Ioannides, E. (1983). Aspects of Computer Simulation of Liquid-Fueled Combustor. *AIAA1983*; 7(6), 482-490. <https://doi.org/10.2514/3.62687>.
- Hamdi, F, Agrebi, S, Idrissi, MS, Mondo, K, Labiadh, Z, Sadiki, A, & Chrighui, M. (2022). Impact of Spray Cone Angle on the Performances of Methane/Diesel RCCI Engine Combustion under Low Load Operating Conditions. *Entropy (Basel)*, 24(5), 650. doi: 10.3390/e24050650.
- Harari, PA, Yaliwal, VS, & Banapurmath, NR. (2021). Effect of CNG and CBG as low reactivity fuels along with diesel and TPME as high reactivity fuels in RCCI mode of combustion by varying different loads. *Materials today: Proceedings*. 47, Part 10, 2491-2494. <https://doi.org/10.1016/j.matpr.2021.04.557>.
- Hardy, WL, & Reitz, RD. (2006). A Study of the Effects of High EGR, High Equivalence Ratio ( $\Phi$ ), and Mixing Time on Emission Levels in a Heavy-Duty Diesel Engine for PCCI Combustion, *SAE*, 01-0026.
- Jafari, B, & Seddiq, M. (2019). An Experimental Investigation of the Effects of Diesel Fuel Injection Characteristics in a Heavy-Duty Direct Injection (HDDI) Diesel Engine. *Gas Processing Journal*, 1, 53-64.
- Jafari, B, & Domiri Ganji, D. (2013). Numerical Investigation in the Effect of Number of Nozzle Hole on Performance and Emission in Dual Fuel Engine. *Automotive Science and Engineering (ASAE), Iran University of Science & Technology*, 3 (2), 6.
- Jafari, B, Domiri Ganji, D, & Mirsalim, SM. (2013). Experimental and Numerical Investigation of the Effect of Exhaust Gas Recirculation on Performance and Emissions of a Dual Fuel (Diesel-Gas) Engine. *Australian Journal of Basic and Applied Sciences*, 7(7), 668-678.
- Jafari, B, & Seddiq, M. (2021). Effects of Fuel Injection Strategies in a RCCI Heavy-Duty Diesel Engine. *Springer*, 46, Article number: 6.
- Jafari, B, Seddiq, M, & Mirsalim SM. (2021). Impacts of diesel injection timing and syngas fuel composition in a heavy-duty RCCI engine. [Energy Conversion and Management](https://doi.org/10.1016/j.energy.2021.114759), 247, 114759.
- Jain, A, Krishnasamy, A, & Pradeep, V. (2021). Computational optimization of reactivity controlled compression ignition combustion to achieve high efficiency and clean combustion. *International journal of engine research*, 22(7), 2213-2232. <https://doi.org/10.1177/1468087420931730>.
- Jie, L, Junle, W, & hongbo, Z. (2018). Optimization of the injection parameters and combustion chamber geometries of a diesel/natural gas RCCI engine. *Energy*, 164, 837-852. <https://doi.org/10.1016/j.energy.2018.09.064>.
- Kakooe, A, Bakhshan, Y, Motadaye Aval, S, & Gharehghani, A. (2018). An improvement of a lean burning condition of natural gas/diesel RCCI engine with a pre-chamber by using hydrogen.

- Energy Conversion and Management*, 166, 489499. <https://doi.org/10.1016/j.enconman.2018.04.063>.
- Kakooee, A, Bakhshan, Y, Gharehghani, A, & Salahi, MM. (2019). Numerical comparative study of hydrogen addition on combustion and emission characteristics of a natural-gas/dimethyl-ether RCCI engine with pre-chamber. (2019). *Energy*, 186, 115878. <https://doi.org/10.1016/j.energy.2019.115878>.
- Kalsi, SS, & Subramanian, KA. (2017). Experimental investigations of effects of hydrogen blended CNG on performance, combustion and emissions characteristics of a biodiesel fueled reactivity controlled compression ignition engine (RCCI). *International Journal of Hydrogen Energy*, 42(7), 4548-4560.
- Karbasi, J, Jazayeri, SA, & Ebrahimi, M. (2022). Performance Analysis of Iranian National Heavy-Duty Diesel Engine under RCCI Combustion Fueled with Landfill Gas and Diesel Fuel. *Gas Processing Journal*, <http://10.22108/gpj.2022.132943.1115>.
- Khatamnejad, H, Khalilarya, S, Jafarmadar, S, & Mirsalim, SM. (2017). Effect of Intake Charge Temperature on Combustion and Emissions characteristics in a Natural Gas-Diesel Reactivity Controlled Compression Ignition Engine. *Gas Processing Journal*, 5(2), 69-78. <http://dx.doi.org/10.22108/gpj.2018.111020.1027>.
- Kokabi, H, Najafi, M, Jazayeri, SA, & Jahanian, O. (2021). Hydrogen and propane implications for reactivity controlled compression ignition combustion engine running on landfill gas and diesel fuel. *International Journal of Hydrogen Energy*. 46(62), 31903-31915. <https://doi.org/10.1016/j.ijhydene.2021.07.050>
- Kokjohn, S, Hanson, R, Splitter, D, Kaddatz, J, & Reitz, RD. (2011). Fuel Reactivity Controlled Compression Ignition (RCCI) Combustion in Light- and Heavy-Duty Engines. *SAE Int. J. Engines*; 4(1): 360-374. <https://doi.org/10.4271/2011-01-0357>
- Kunsberg-Sarre, CV, Kong, SC, & Reitz, RD. (1999). Modeling the Effects of Injector Nozzle Geometry on Diesel Sprays. *SAE paper*; 01-0912. <https://doi.org/10.4271/1999-01-0912>
- Li, Y, Jia, M, Xu, L, & Song Bai, X. (2020). Multiple-objective optimization of methanol/diesel dual-fuel engine at low loads: A comparison of reactivity controlled compression ignition (RCCI) and direct dual fuel stratification (DDFS) strategies. *Fuel*, 262, 116673. <https://doi.org/10.1016/j.fuel.2019.116673>
- Mabadi Rahimi, H, Jazayeri, SA, & Ebrahimi, M. (2021). Multi-Objective Optimization of a RCCI Engine Fueled with Diesel Fuel and Natural Gas Enriched with Hydrogen. *Gas Processing Journal*, 9(2), 33-42. <http://0.22108/GPJ.2021.129302.1105>.
- Mohammadian, A, Chehrmonavari, H, Kakaee, A, & Paykani, A. (2020). Effect of injection strategies on a single-fuel RCCI combustion fueled with isobutanol/isobutanol + DTBP blend. *Fuel*, 278, 118219 <https://doi.org/10.1016/j.fuel.2020.118219>.
- Naber, JD, & Reitz, RD. (1988). Modeling Engine Spray/ Wall Impingement. *SAE*, 880107, 1-26. <https://doi.org/10.1243/1468087001545281>.
- Nieman, DE, Dempsey, AB, & Reitz, RD. (2012). Heavy-Duty RCCI Operation Using Natural Gas and Diesel. *SAE paper*, 01-0379.
- Pandian, M, & Anand, K. (2018). Experimental optimization of reactivity controlled compression ignition combustion in a light-duty diesel engine. *Applied Thermal Engineering*, 138, 48-61. <https://doi.org/10.1016/j.applthermaleng.2018.04.045>
- Rahimi, A, Fatehifar, E, KhoshbakhtiSaray, R. (2010). Development of an Optimized Chemical Kinetic Mechanism for Homogeneous Charge Compression Ignition Combustion of a Fuel Blend of N- heptane and Natural Gas Using a Genetic Algorithm. *Proc Institution Mech. Eng. Part D J Automobile Eng*, 224 (9), 1141-1159. <https://doi.org/10.1243/09544070JAUTO1343>.
- Reitz, RD, & Duraisamy, G. (2015). Review of High Efficiency and Clean Reactivity Controlled Compression Ignition (RCCI) Combustion in Internal Combustion Engines. *Progress in Energy and Combustion Science*, 46, 12-71. <https://doi.org/10.1016/j.pecs.2014.05.003>.
- Sattarzadeh, M, Ebrahimi, M, & Jazayeri, SA. (2022). A detail study of a RCCI engine performance fueled with diesel fuel and natural gas blended with syngas with different compositions. *International Journal of Hydrogen Energy*, 47(36), 16283-16296.
- Szamrej, GA, Karczewski, M, Chojnowski, J. (2022). A review of technical solutions for RCCI engines. *Combustion Engines*, 189(2), 36-46. DOI: <https://doi.org/10.19206/CE-142551>.
- Walker, NR, Wissink, ML, DeVescovo, DA, & Reitz RD. (2015). Natural Gas for High- Load Dual-fuel RCCI in Heavy- Duty Engines. *Journal of Energy Resources Technology*, 137(4), 1-7.
- Wang, H, Zhong, X, Mi, S, & Yao, M. (2020). Numerical investigation on the combustion characteristics of PODE3/gasoline RCCI and high load extension. *Fuel*, Volume 263, 116366. <https://doi.org/10.1016/j.fuel.2019.116366>.
- Wang, L, Liu, J, Ji, Q, Sun, P, Li, J, Wei, M, & Liu, S. (2022). Experimental study on the high load extension of PODE/methanol RCCI combustion mode with optimized injection strategy. *Fuel*, 314, 122726. <https://doi.org/10.1016/j.fuel.2021.122726>.
- Xia, L, Willems, R, De jager, B, & Willems, F. (2019). Constrained Optimization of Fuel Efficiency for RCCI Engines. *IFAC-Papers Online*, 52(5), 648-653. <https://doi.org/10.1016/j.ifacol.2019.09.103>.
- Zou, X, Wang, H, Zheng, Z, Reitz, RD, & Yao, M. (2016). Numerical study of the RCCI combustion Processes Fuelled with Methanol, Ethanol, n-Butanol and Diesel. *SAE Technical Paper*, 01-0777.